



Syrex 5 Voice Over and Kommander

- Voice enhanced sounders for clear, precise safety warnings
- Choice of pre-recorded or user-recordable units
- Weatherproof to IP54 (Syrex 5 Voice Over)/ IP65 (Kommander)
- Choice of voltages for all applications
- Volume control for greater flexibility
- Multi purpose base with a variety of cable entries and fixing holes for easy installation

Klaxon voice enhanced sounders are designed to convey voice messages in addition to the standard tones. This is particularly important in locations where alarms may be misunderstood or ignored, such as pubs, night clubs, restaurants and cinemas.

The Syrex 5 Voice Over has three pre-recorded messages designed for fire alarm use. Standard messages are:

1. "Fire. Please evacuate immediately"
2. "This is a fire alarm test: no action is required"
3. "Fire alarm test now complete"

The Kommander is a voice sounder with a built-in microphone, allowing the user to record up to four messages. This enables the user to provide clear and effective messages tailored to each situation. With its flexibility of use and a wide choice of voltages, the Kommander is equally suited for use in both fire alarm and industrial applications.

Applications

- Fire alarm
- Voice alarm
- Security
- Conveyors
- Cranes
- Moving machinery
- Process control alarm

Fire ✓

Industrial ✓

Hazardous Area ✗


Security ✓

Railway/Marine ✓

Public Warning ✗

Klaxon

The first name in signals

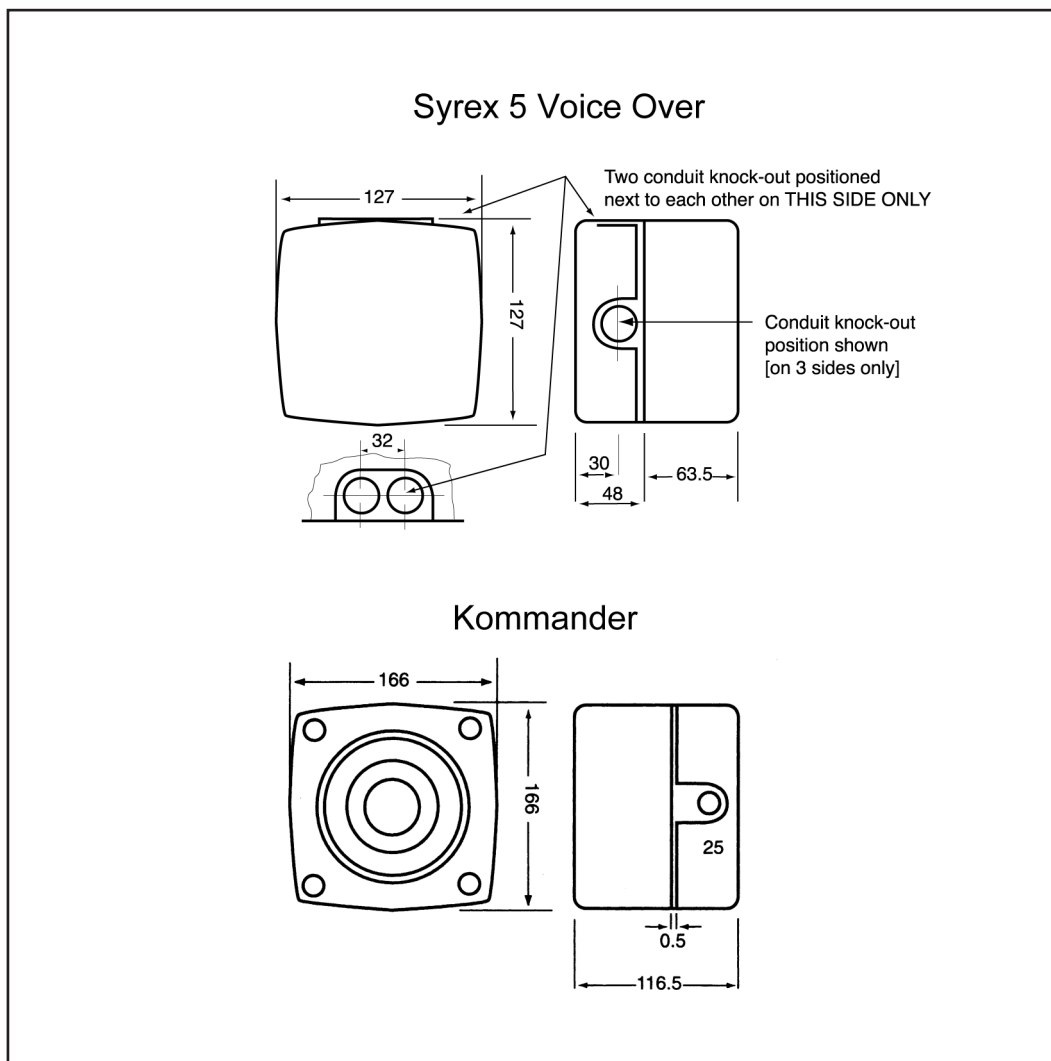

Part No.	Colours	Audibility at 1m	Tones	Voltage	Current
Syrex 5 Voice Over					
18-980168	Red	97/102dB (A) ±3dB	4	24V DC	30mA
18-980409	White	97/102dB (A) ±3dB	4	24V DC	30mA
Kommander					
18-980324	Red	97dB (A) ±3dB (voice)	16	12V DC	150mA
18-980085	Red	97dB (A) ±3dB (voice)	16	24V DC	150mA
18-980086	Red	97dB (A) ±3dB (voice)	16	110/230V AC	250mA

IP Rating: Syrex 5 Voice Over: IP54; Kommander: IP65
Rating: Continuous
Frequency: Varies according to tone selected
Operating temp: Syrex 5 Voice Over: -40°C to +55°C; Kommander: -20°C to +50°C
Construction: High Impact ABS Flame Retardant
Cable Entries: Various (see drawing)
Weight: Syrex 5 Voice Over: 0.4kg; Kommander (DC): 0.6kg; Kommander (AC): 0.8kg