

Tech specs

 BASELINE

MotionProtect Outdoor Jeweller

Wireless IR motion detector for outdoor and indoor use



Device compatibility

Check

Communication

 Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more [➤](#)

Frequency bands

866.0–866.5 MHz

868.0–868.6 MHz

868.7–869.2 MHz

905.0–926.5 MHz

915.85–926.5 MHz

921.0–922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Detection

Sensitive elements

2 × PIR sensor


Motion detection distance

up to 3–15 m

When installed at a height of 0.8–1.3 m.
Adjusted with a scrollbar on the device enclosure.

Learn more >

Motion detection angles

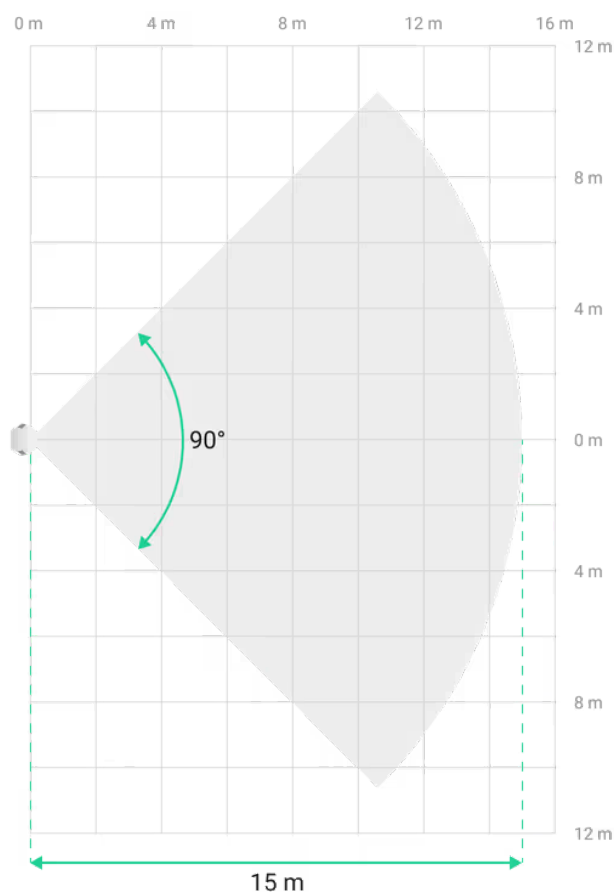

horizontal — 90°

vertical — N/A

Motion detection speed

from 0.3 to 2.0 m/s

The direction of the detector lens should be perpendicular to an alleged intrusion path into the facility.

Sensitivity

3 levels

Adjusted by PRO or user with admin rights in the Ajax app.

Pet immunity

weight: not relevant

height: up to 80 cm

[Learn more](#) >

False alarm prevention

LISA

SmartDetect

Software algorithms.

Temperature compensation

Effective motion detection at temperatures from -25 °C to +60 °C.

Recommendations

It is recommended to install the detector at a height of 0.8–1.3 m. The device is designed for indoor and outdoor use. Install Hood to protect the detector's anti-masking system from rain and snow.

Sabotage protection

Tamper alarm

Notifications on attempts to detach the detector from the surface or remove it from the mounting panel.

Learn more >

Protection against spoofing

device authentication

Anti-masking system

detects attempts to block the detector view

Learn more >

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

[Learn more](#) >

Main power supply

Battery

2 × CR123A

Pre-installed.

Type

type C

Calculated battery life

up to 5 years

[Learn more](#) >

Detector's operating voltage range

2.1–3.3 V_{DC}

Detector's nominal operating voltage

3 V_{DC}

Quiescent detector's current consumption at nominal voltage

79 μA

Maximum detector's current consumption at nominal voltage

58.8 mA

Full battery capacity

3,200 mAh

Low battery voltage

2.5 V $\equiv$

Low battery recovery voltage

2.7 V $\equiv$

End-of-life battery voltage

2.1 V $\equiv$

Device is switched off.

End-of-life battery capacity

480 mAh

Manufacturer

Huiderui

Optional power supply

External supply's operating voltage

5–28 V_{DC}, from 200 mA

The batteries serve as a backup when external power supply is connected.

Enclosure

Dimensions

183 × 70 × 65 mm

Weight

322 g

Operating temperature range

from -25 °C to +60 °C

Operating humidity

up to 95%

Protection class

IP55



Colors

White



Complete set

MotionProtect Outdoor Jeweller

SmartBracket mounting panel

Installation kit

2 × CR123A battery (pre-installed)

Quick start guide

Certification and compliance with standards



MotionProtect Outdoor Jeweller



Additional information

Compliance with standards

[Learn more](#) >

User manual

[Learn more](#) >

Warranty

24 months

[Learn more](#) >

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

+447451279411

support@ajax.systems

@AjaxSystemsSupport_Bot

Ask a question



Rating 4.8

4,500,000

people worldwide under Ajax protection

[? Suggest a feature](#)



Products

Software

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Wireless Grade 3 solution

Video surveillance solution

Integration with Yale smart locks

Upgrades and retrofits

Why Ajax

How it works

Company

Blog

Ajax Security System

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop


Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Ajax Media Player

Scenarios



Support

Manuals and articles

Compliance with standards

Tools

Ajax kit configurator

Ajax device compatibility

CMS software compatibility

Ajax Services availability

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

For partners

For partners

[About us](#)
[Press page](#)
[Events](#)
[Career](#)
[Ajax Next](#)
[Reviews and feedback](#)

[Ajax Academy](#)
[Partner Portal](#)
[Ajax PRO channel](#)

 [United Kingdom](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)
[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved