

Tech specs

 BASELINE

StreetSiren Jeweller

Wireless siren for indoor and outdoor use



Device compatibility

Check

Communication

 Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more [➤](#)

Frequency bands

866.0–866.5 MHz

868.0–868.6 MHz

868.7–869.2 MHz

905.0–926.5 MHz

915.85–926.5 MHz

921.0–922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,500 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Wings communication technology

Proprietary wireless communication technology to update firmware.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Data packages reload in case of transmission errors.
- Checking the delivery of data packages.

Frequency bands

866.0–866.5 MHz

868.0–868.6 MHz

868.7–869.2 MHz

905.0–926.5 MHz

915.85–926.5 MHz

921.0–922.0 MHz

Depends on the sales region.

Radio communication range

up to 900 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Key features

Alarm type


acoustic and LED

Buzzer and LED frame.

Type of warning device

type X

External, self-powered, and remote power source compliant with EN 50131-6.

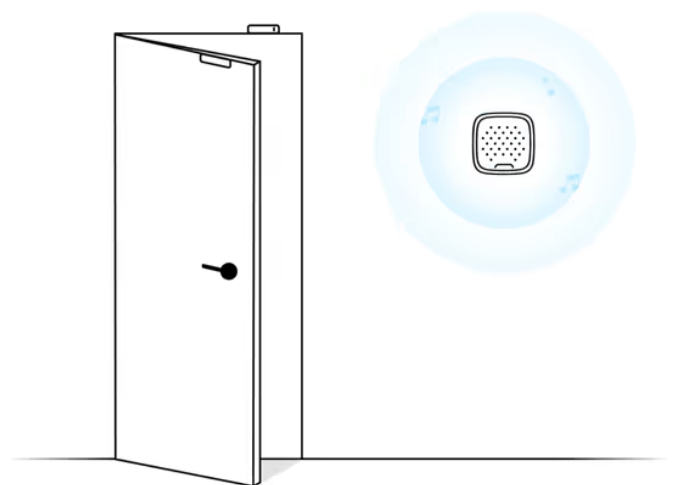

Alarm volume

from 85 to 113 dB at a distance of 1 m

Adjusted by PRO or user with admin rights in the Ajax app.

Alarm duration

from 3 s to 3 min

Alarm duration up to 15 minutes is available only for siren with firmware version NA 5.60.4.14 or higher and with **Quiet** or **Loud** alarm volume.

Adjusted by PRO or user with admin rights in the Ajax app.

Siren sound frequency

1.60–4.5 kHz

Acoustic output type

tone

Events indication

- Alarms.
- Delays when entering/leaving.
- Security mode.
- Security mode changing.
- After-alarm indication.

Chime

The siren makes a special sound to notify that the opening detectors are triggered when the system is disarmed.

Learn more >

Recommendations

The siren is designed for indoor and outdoor use. Recommended installation height is 2.5 m and higher.

Sabotage protection

Tampering alarm

Notifications on attempts to open the siren's enclosure.

Learn more >

Accelerometer alarm

Notifications on attempts to move or shake the siren, or detach it from the surface.

Protection against spoofing

device authentication

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

[Learn more](#) >

Main power supply

Battery

4 × CR123A

Pre-installed.

Type

Type C.

Calculated battery life

up to 5 years

[Learn more](#) >

Siren's operating voltage range

3.65–6.2 V $\approx$

Siren's nominal operating voltage

6 V $\approx$

Quiescent siren's current consumption at nominal voltage

71 μA

Peak siren's current consumption at nominal voltage

1 A

When the siren sounds at the **Very Loud** volume level.

Average siren's current consumption at nominal voltage

0.3 A

When the siren sounds at the default volume level. Regardless of the arming mode.

Full battery capacity

6,400 mAh

Low battery voltage

4.25 V $\equiv$

Low battery recovery voltage

5.05 V $\equiv$

End-of-life battery voltage

3.65 V $\equiv$

Device is switched off.

End-of-life battery capacity

460 mAh

Manufacturer

Huiderui or Panasonic

Optional power supply

Remote power supply's operating voltage

6–20 V_{DC}

Remote power supply's nominal voltage

12 V_{DC}

Quiescent siren's current consumption at nominal voltage

25 mA

Average siren's current consumption at nominal voltage

0.2 A

When the siren sounds at the default volume level. Regardless of the arming mode.

Peak siren's current consumption at nominal voltage

0.7 A

When the siren sounds at the **Very Loud** volume level.

Enclosure

Dimensions

200 × 200 × 51 mm

Weight

528 g

Operating temperature range


from -25°C to +60°C

Operating humidity

up to 95%

Protection class

IP54

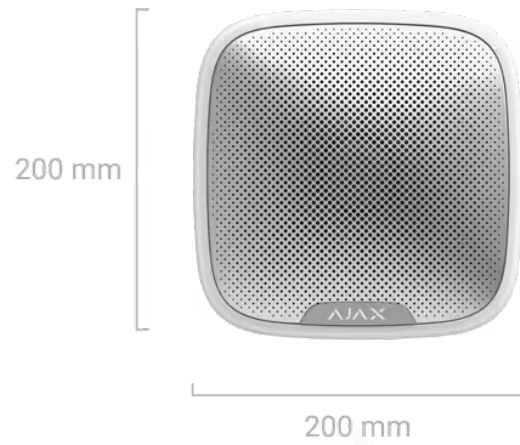

Colors

Black



White



Complete set

StreetSiren Jeweller

SmartBracket mounting panel

Installation kit

4 × CR123A battery (pre-installed)

Quick start guide

Certification and compliance with standards



StreetSiren Jeweller



Additional information

Compliance with standards

User manual

Learn more >

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

+447451279411

support@ajax.systems

@AjaxSystemsSupport_Bot

Ask a question



Rating 4.8

4,500,000

people worldwide under Ajax protection

Suggest a feature



Products

Intrusion protection

Software

Ajax Security System

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop

Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Ajax Media Player

Scenarios



Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Wireless Grade 3 solution

Video surveillance solution

Integration with Yale smart locks

Upgrades and retrofits

Why Ajax

How it works

Support

Manuals and articles

Compliance with standards

Tools

Ajax kit configurator

Ajax device compatibility

CMS software compatibility

Ajax Services availability

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

Company

Blog

About us

For partners

For partners

Ajax Academy

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

[Partner Portal](#)

[Ajax PRO channel](#)

[!\[\]\(7a315dbd5736d1ca324577d88145843b_img.jpg\) United Kingdom](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved