

Tech specs

BASELINE

NVR H2DAC (8-ch)

8-channel network video recorder with 4K HDMI output and support for 2 hot-swappable HDDs



Video

Video input

8 channels

Recording resolution

12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, UXGA, 720p, VGA, 4CIF, DCIF, 2CIF, CIF, QCIF

HDMI output resolution

3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 px

Live view / playback resolution

12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 720p, D1, VGA, CIF

Decoding

Format

H.265, H.264, JetSparrow

Capability

- 2 × channel at 4096 × 4096 px (25 fps)
- 4 × channel at 3840 × 2160 px (25 fps)
- 8 × channel at 2880 × 1620 px (25 fps)

Live view window division

templates: 1, 4, 9, 16, 25, 5+1, 7+1, 12+1 views

custom: up to 10×10 views

Synchronous playback

4 channels

Intelligent video analytics

Motion detection

Ajax camera: 8 channels

NVR: 8 channels

NVR features built-in software to detect movement in the frame. It is possible to switch between image analysis by NVR or camera algorithms in an Ajax app.

Interface

HDD/SSD

2 × SATA III: supports drives with up to 16 TB capacity (2.5" and 3.5" form factors)

Supports full hot-swap functionality. HDDs or SSDs are not included.

Network

1 × RJ45 self-adaptive Ethernet (10/100/1000 Mbps)

USB

rear panel: 2 × USB 2.0 (Type-A)

For connecting a keyboard, mouse, or USB Audio Device Class devices (Audio IN/Audio OUT).

front panel: 1 × USB 2.0 (Type-A)

To connect a USB flash drive.

Network

Bandwidth

incoming: up to 160 Mbps

outgoing: up to 160 Mbps

Protocol

HTTP, HTTPS, TCP/IP, IPv4, IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS

Interoperability

ONVIF

Key features

Supported devices

- Ajax cameras
- IP cameras via ONVIF (Profile S/T) or RTSP

Redundancy mode

Simultaneous recording of the same video streams to two storage devices to ensure data redundancy and reliability.

Split mode

Sequentially distributes video streams across multiple storage devices to balance the load and optimize storage.

Built-in video management system

- Integrated video wall interface with live camera feeds.
- Smart event filters for quick access to relevant video recordings.
- Interactive timeline with preview navigation for efficient playback and incident review.

Visual verification of Ajax system alarms

NVR supports a scenario in which events triggered by Ajax detectors automatically highlight the corresponding camera feed on the video wall. This allows an operator to immediately verify the intrusion.

Privacy

Advanced privacy controls ensure a high level of personal data protection. All access rights — including those for mobile app users, installers, and monitoring company operators via Ajax PRO Desktop — are fully configurable by the device owner. This guarantees that only authorized parties can access video streams, event history, or device settings in accordance with the owner's preferences.

Accelerometer

alarm when NVR is moved

Recommendations

The device's operating voltage is 100–240 V~.

The device is designed for indoor installation only.

Power supply

Main

100–240 V, 50/60 Hz, 0.6 A

Power consumption

up to 60 W

Clock battery


CR2032 battery, 3 V

Only to power the system clock.

Enclosure

Dimensions


330 × 330 × 44 mm

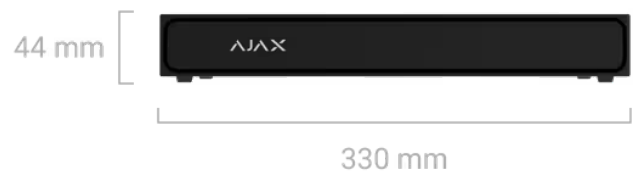

Weight

2.8 kg

Without drives.

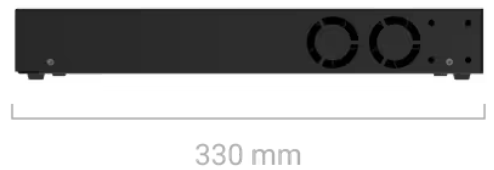

Operating temperature range

from 0 °C to +50 °C

Operating humidity

up to 75%

Protection class

IP20

Color

Black



White



Complete set

NVR H2DAC (8-ch)

2 × rack-mount brackets

Power cable

Ethernet cable

Installation kit

Quick start guide

Additional information

Compliance with standards

User manual

Learn more >

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

+447451279411

support@ajax.systems

@AjaxSystemsSupport_Bot

Ask a question



Rating 4.8

4,500,000

people worldwide under Ajax protection

Suggest a feature



Products

Intrusion protection

Video surveillance

Software

Ajax Security System

Ajax PRO: Tool for Engineers

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Wireless Grade 3 solution

Video surveillance solution

Integration with Yale smart locks

Upgrades and retrofits

Why Ajax

How it works

Company

Blog

About us

Press page

Ajax Desktop

Ajax PRO Desktop


Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Ajax Media Player

Scenarios



Support

Manuals and articles

Compliance with standards

Tools

Ajax kit configurator

Ajax device compatibility

CMS software compatibility

Ajax Services availability

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

For partners

For partners

Ajax Academy

Partner Portal

[Events](#)

[Ajax PRO channel](#)

[Career](#)

[Ajax Next](#)

[Ajax PRO channel](#)

[Reviews and feedback](#)

[!\[\]\(cbe2492b119e39e02a1dab2af4a4b296_img.jpg\) United Kingdom](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved