

Tech specs

AJAX SUPERIOR

Superior StreetSiren DoubleDeck Fibra

Wired siren with a clip lock for a branded faceplate



Device compatibility

Check

Communication

💎 Fibra communication technology

Proprietary wired communication technology. Fibra combines the reliability of wires with the freedom of radio connection.

It features:

- Two-way communication.
- Advanced anti-sabotage.
- Instant notifications.
- Remote configuration via the Ajax apps.

Learn more >

Line connection

4-core cable

Fibra line length

up to 2,000 m

When using the U/UTP cat.5 twisted pair.

Calculate the line length at the facility >

Encrypted communication

Key features

Alarm type


acoustic and LED

Buzzer and LED frame.

Type of warning device

type Z

External.

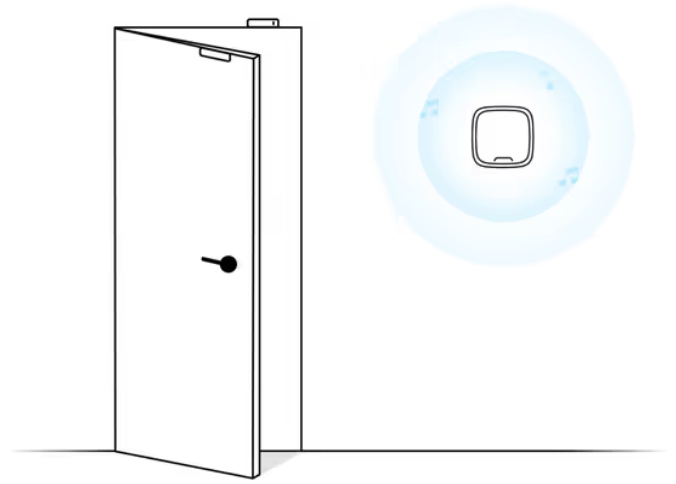

Type of acoustic output

tone

Alarm volume

from 85 to 113 dB at a distance of 1 m

Adjusted by PRO or user with admin rights in the Ajax app.

Alarm duration

from 3 s to 3 min

Adjusted by PRO or user with admin rights in the Ajax app.

Siren sound frequency

3.5 ± 0.5 kHz

Chime

The siren makes a special sound to notify that the opening detectors are triggered when the system is disarmed.

Learn more >

Events indication

- Alerts.
- Entry/exit delays.
- Security mode.
- Security mode changing.
- After-alarm indication.

Remote firmware update

An admin or a PRO with the rights to configure the system can run the update in Ajax apps. Available when the siren with firmware version **8.64.1.0** or later is added to a hub running OS Malevich 2.36 or later.

Learn more >

Recommendations

The siren is designed for indoor and outdoor use. Recommended installation height is 2.5 m and higher.

Customized branded faceplate

Brandplate

Security service providers can print their logo and contact information on the siren's front panel.

[Learn more](#) >



Recommendations

Brandplate is sold separately from street sirens. To place an order, reach out to your regional Ajax [partner](#). You can also compose a faceplate design in the [Brandplate constructor](#).

Sabotage protection

Tampering alarm

Sends notification if anyone tries to detach the siren from its surface or remove the device from the mounting panel.

[Learn more](#) >

Protection against forgery

device authentication

Power supply

Siren's operating voltage range

7–26 V_{DC}, up to 1130 mW

Superior StreetSiren DoubleDeck Fibra is powered by the control panel.

Siren's nominal operating voltage

24 V_{DC}

Maximum siren's current consumption at nominal voltage

47.1 mA

Quiescent siren's current consumption at nominal voltage

2 mA

Peak siren's current consumption at nominal voltage

67 mA

When the siren sounds at the **Very Loud** volume level.

Average siren's current consumption at nominal voltage

65 μ A

When the siren sounds at the default volume level. Regardless of the arming mode.

Battery

LTO 2.4 V= rechargeable battery

Pre-installed.

Capacity of the battery

1,500 mAh

The system notifies when the siren battery has 20% of its nominal capacity.

Enclosure

Dimensions

199 × 199 × 60 mm

Weight of the black device

522 g

Weight of the white device

531 g

Operating temperature range

from -25°C to +60°C

Operating humidity

up to 95%

Protection class

IP54, IK07



Colours

Black

White



Complete set

Superior StreetSiren DoubleDeck Fibra

SmartBracket mounting panel

Installation kit

Quick start guide

Certification and compliance with standards



Superior StreetSiren DoubleDeck Fibra



Additional information

Compliance with standards

User manual

Learn more >

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

+447451279411

support@ajax.systems

@AjaxSystemsSupport_Bot

Ask a question



Rating 4.8

4,500,000

people worldwide under Ajax protection

Suggest a feature



Products

Intrusion protection

Video surveillance

Software

Ajax Security System

Ajax PRO: Tool for Engineers

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Solutions

Customer stories

Solutions by facility type

Commercial fire detection and alarm system

Wireless Grade 3 solution

Wired Grade 3 solution

Video surveillance solution

Integration with Yale smart locks

Water damage prevention

Upgrades and retrofits

Why Ajax

How it works

Company

Blog

About us

Press page

Ajax Desktop

Ajax PRO Desktop


Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Ajax Media Player

Scenarios



Support

Manuals and articles

Compliance with standards

Tools

Ajax kit configurator

Ajax device compatibility

CMS software compatibility

Ajax Services availability

Video storage calculator

Video device calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

For partners

For partners

Ajax Academy

Partner Portal

[Events](#)

[Ajax PRO channel](#)

[Career](#)

[Ajax Next](#)

[Ajax PRO channel](#)

[Reviews and feedback](#)

[!\[\]\(341b5bdc31177a6c7da7dc713da0d169_img.jpg\) United Kingdom](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved